



PEDESTRIAN RAILING DETAIL

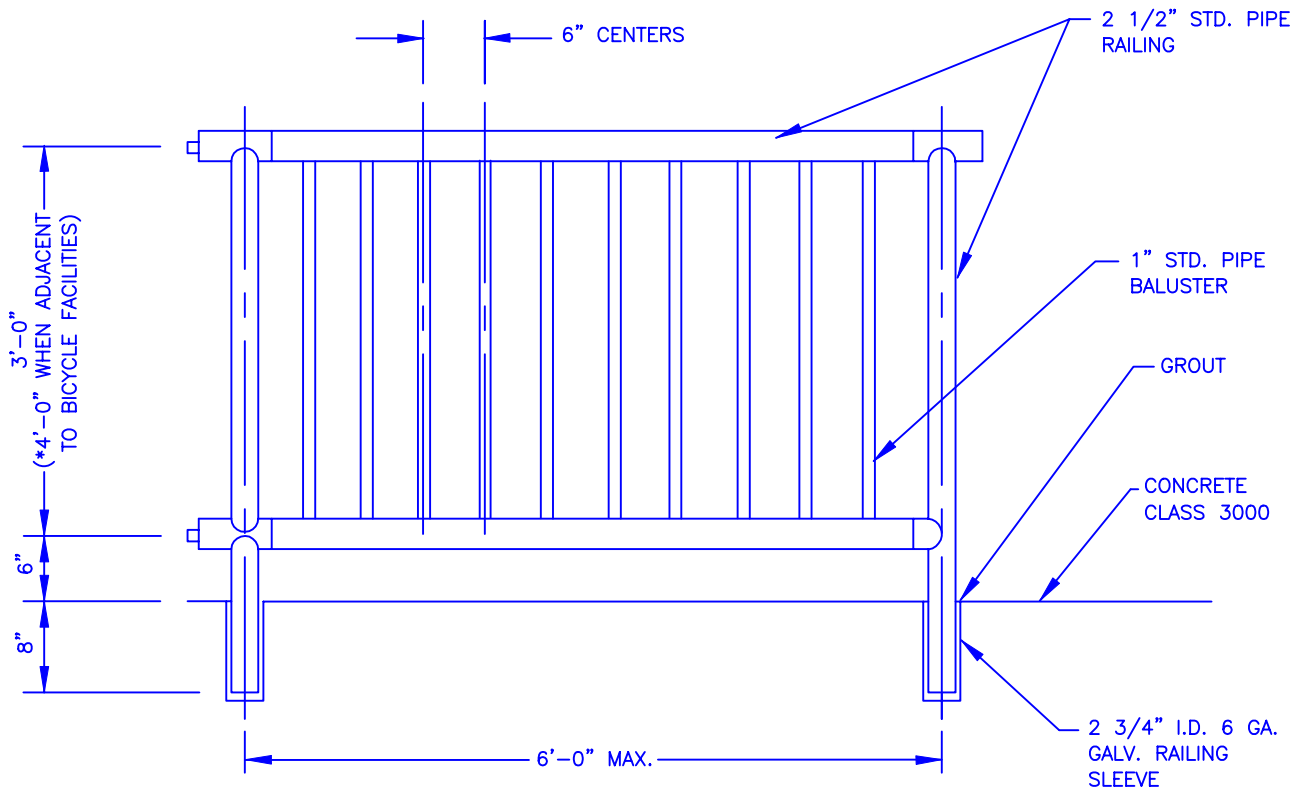

SAFETY RAILING DETAIL

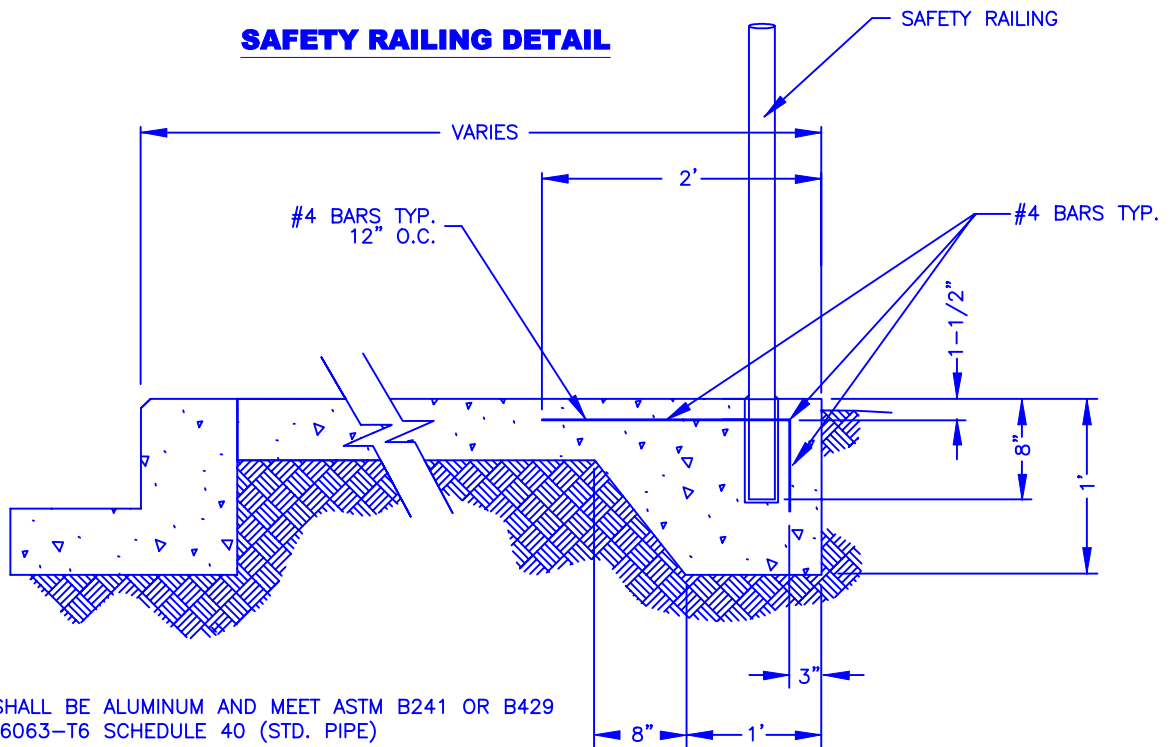

NOTES:

1. PIPES SHALL BE ALUMINUM AND MEET ASTM B241 OR B429 ALLOW 6063-T6 SCHEDULE 40 (STD. PIPE)
2. ALL ALUMINUM PARTS SHALL BE GIVEN A BRONZE ANOTIC COATING AT LEAST 0.0006 INCH THICK AND HOT WATER SEALED AND SHALL HAVE A UNIFORM FINISH.

NO SCALE

APPROVED: DAVE ALM

REV. DATE: JULY 1, 2000

TRANSPORTATION DIVISION



STANDARD DETAILS

TYPICAL PEDESTRIAN RAILING

FILE SD321.DWG DRAWING NO. **321**